

TM(W"L")L2

Economy Vinyl Table Mat

Our Economy mats cleverly combine a top layer of durable static dissipative vinyl with foam backing for adequate electrical properties and cushioning while providing the most inexpensive static safe work surface. Great for work tables, areas around computers, copiers and PBX equipment.

Standards

Meets the requirements MILI-HDBK-263, and MIL-STD-1686.

Specifications

Resistance to Ground point (RTG) 10¹⁰ ohms
Resistance Top to Top (RTT) 10¹⁰ ohms
Thickness: 0.125 inches
Color: Gray

Part Numbers

Mats Includes mat, two snaps, installed.

SIZE GRAY P/N
24x48 inches TM2448L2RGR

Call for custom sizes.

Mat Kits Includes mat, two snaps, installed, and a 15 foot ground cord.

SIZE GRAY P/N
24x48 inches TM2448L2RGR-L

Call for custom sizes.

Rolls Includes roll of matting material.



SIZE GRAY P/N
4x100 feet TM481200L2GR

See SCC Data Sheets for these related items:

Ground Cords

Snaps

Snap Tool

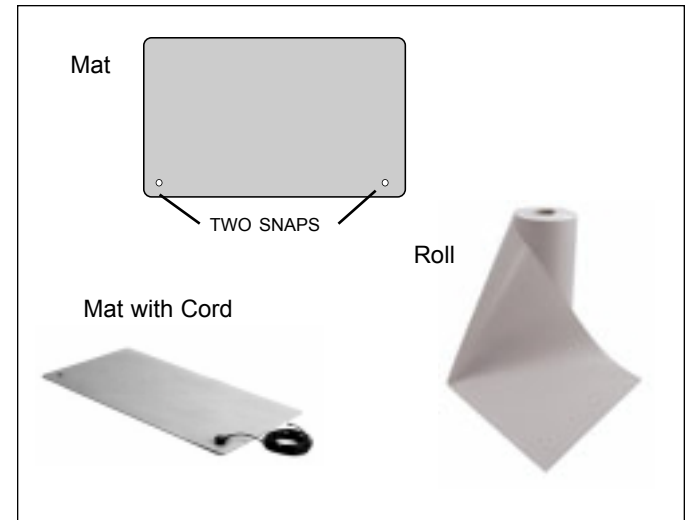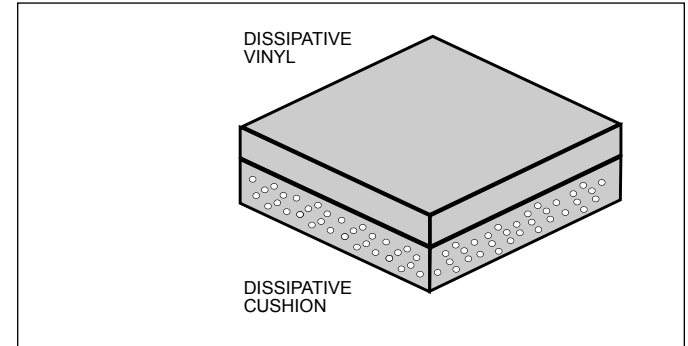

R - T - G?

RTG is the resistance from one point on the mat's surface to the mat's ground point, and is the fundamental electrical test for a mat. A proper RTG insures that a mat can conduct charge from a point on the surface to the mat ground point. The guideline in ESD STM-4.1 for RTG is 1x10⁹ to 1x10¹⁰ ohms. ANSI/ESD S-20.20 has an upper limit of <1 x10⁹ ohms.

RTT is the resistance from one point on the mat's surface to another point. A proper RTT insures the consistency of the mat's resistance properties. The ESD STM-4.1 guideline for RTT is >1x10⁹ ohms.

P R O D U C T D A T A S H E E T

Mat - Economy Vinyl- TABLE MAT

PRODUCT
ECONOMY VINYL MAT

ITEM NUMBER
SEE ABOVE

DATASHEET
1135-A



US and Canada: 866-722-3736
Fax: 866-722-3735
Intl: 919-774-3808
Fax: 919-774-1287
3010 Lee Avenue Sanford, NC 27330
email: info@staticcontrol.com
www.StaticControl.com